


AquaClean A Closed Loop System for Marinas & Boatyards

AquaClean™ Recycling **Boatwash System**

- 20 GPM Flow rate.
- 250 Gallon Capacity Storage Tank
- Small Footprint
- 110 VAC
- Auto level control and recirculation
- Hydrocarbon reduction
- Solids reduction 5 microns
- Abatement of organics and biological fouling using UV and oxidation treatment.
- Provides clean recycled water to spray wash equipment
- Optional AquaClean Absorbent Medium Cartridge Filter mitigates trace heavy metals and oils.
- Eliminate Odors
- Economical Filters are easy to change
- · Delivered factory ready on corrosion-resistant skid
- Fast, easy installation

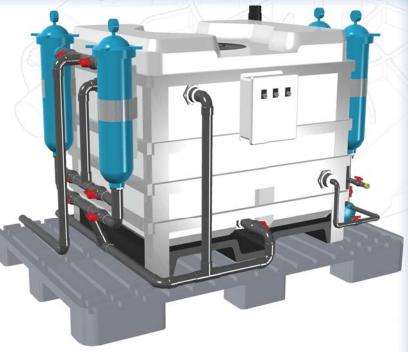

The AquaClena uses a logical filtration process that methodically captures solids at the proper stages to assure clean recycled water and low maintanance.

- 1.(2) 100 microm filters capture large solids before the wash water enters the storage tank.
- 2. The recirculation pump continuosly feeds the water through the UV light and bromine treatment to sterilize the water, oxidize the water, and remove coagulated metals and oil particulates with the 10 micron polish filter.
- 3. The optional AquaClean Absorbent Medium Cartridge Filter throughly removes solids, oils, and metals and encapsulates them in a nonleachable medium as the water exits the reservoir and returns to the spray wash equipment.





Product Line

The perfect closed loop recycling system product line for marina's & boatyards"



AquaHaul

Used For Low Volume Washing & Seasonal Haul-Out Washing

15 Gallons Per Minute & Supports 1-2 Pressure Washers

60 Gallon Reservoir

175 Gallon Settling Tank

Ultra-Violet & Bromine Treatment



AquaClean Without Pre-Treatment

Used For High & Dry, Seasonal & High Volume Washing

20 Gallons Per Minute & Supports 1-4 Pressure Washers

250 Gallon Recirculating Tank

5/10/20 Micron Solids Reduction

Ultra-Violet & Bromine Treatment

Square tanks are proven better for re-circulating



AquaClean Including Pre-Treatment

Used For Boatyards, High & Dry, High Volume Washing, Excellent For Slough, Bottom Growth Removal

20 Gallons Per Minute & Supports 1-4 Pressure Washers

125 Gallon Secondary Reservoir

450 Galon Settling Tank

Ultra-Violet & Bromine Treatment

Square tanks are proven better for re-circulating Round pre-treatment tank helps settling

Call to speak with one of our knowledgeable sales engineers today for help selecting the right product for your site including the critical wash pad design!



t. (800) 355-786**7**

aquacleansolutions.com | empsales@empind.net

